

UC-PD5

3ch USB Power Delivery Charger



Instruction Manual

PD

Thank you for purchasing the UC-PD5. This UC-PD5 is the charger which supports USB PD (Power Delivery) function. We strongly recommend reading this Instruction Manual on how to best use the UC-PD5. Please keep this manual for your reference. If you have any additional questions, please contact your local IDX office listed at the end of this manual.

Caution for safety use

Please be sure to read the Instruction Manual and follow the instructions. Failure to follow the instructions may cause an electric shock, injury, fire or malfunction.

⚠ WARNING

May cause sudden serious injury and death

- Do not connect to an AC power source that exceeds the voltage specification stated on the unit.
- Use only with the compatible batteries listed in this manual.
- Do not short the contact pins with any metal object.
- Do not carry or store with metal equipment.
- Do not immerse in water.
- Do not attempt to open the outer casing or break apart.
- Keep away from extreme physical impact or pressure, or place any object across the terminals that could cause it to short.
- Do not attempt to use if damaged.
- Protect the power cord from any damage.
- Do not use the charger which has damages on the cable and connector is deformed.

⚠ CAUTION

May cause sudden serious injury and death

- Use the approved power cord / appliance connector / plug conforming to the proper ratings (voltage, ampere) and safety regulations of each country if applicable.
- Keep the unit away from excessively dry hot or humid environments.
- Stop charging immediately if the charging does not complete within the designated time.
- In case of abnormal smell, leak, color change or case deformity during use, turn the power off and unplug the cable from the socket to avoid possible injury.
- Do not carry the charger while the battery is attached.
- Do not charge the battery while the battery is used with equipments.
- Do not charge the battery while the battery is charged from other charger.

Features

- IDX Lithium-ion batteries equipped with USB PD can be charged.
- Equipped with three USB-C ports, the charger supports USB PD output of up to 140W on C1 when used alone, 100W + 65W when two ports are used simultaneously, and 65W + 65W + 30W when all three ports are used simultaneously. Simply connecting a battery automatically adjusts the output voltage, enabling optimal charging performance according to the connected battery.
The maximum charging output is subject to the USB PD input specifications of the connected battery.
- Equipped with one USB-A ports, it can supply up to 30W.
It can be used for portable devices powered by USB.
- AC plug can be folded and stored.
- POWER LED lights when connecting the AC plug to the outlet.
- The unit features a protection function that automatically reduces output power when the internal temperature rises, and restores normal output once the temperature returns to a safe level.


Operating Instructions

※Before use, attach the plug adapter suitable for your country or region as required.

1. Connect the AC plug to the outlet.

⚠ Warning : Use in a flat surface only.

* The shape of the AC plugs varies by region



2. Connect the supplied USB Type-C cable into the USB-C port on the charger and the USB-C port on the IDX battery to start charging.


Confirm the IDX battery LED indicator is lit up when charging.

3. Remove the connector after charging.


Specifications

- Recommended batteries : IDX Lithium Ion batteries equipped with USB PD
- Input voltage : AC100V~240V 50 / 60Hz
- Rated Output (Single-Port Operation):
USB C1 port: PD 3.3V-21V/5A, DC5V/3A, DC9V/3A, DC12V/3A, DC15V/3A, DC20V/5A, DC28V/5A(MAX140W)
: QC DC5V/3A, DC9V/2A, DC12V/1.5A
USB C2 port: PD 3.3V-21V/5A, DC5V/3A, DC9V/3A, DC12V/3A, DC15V/3A, DC20V/5A(MAX100W)
: QC DC5V/3A, DC9V/2A, DC12V/3A, DC20V/3A
USB C3 port: PD 3.3V-11V/5A, DC5V/3A, DC9V/3A, DC12V/3A, DC15V/3A, DC20V/3.25A(MAX65W)
: QC DC5V/3A, DC9V/2A, DC12V/3A, DC20V/3A
USB A port: DC5V/3A, DC9V/3A, DC12V/2.5A, DC20V/1.5A (MAX30W)
- DC Connector : USB Type-C 3port / USB Type-A 1port
- Operating temperature : 0 ~ 25°C / 32 ~ 77°F
- Operating humidity : 20% ~ 80% RH
- Protection circuit : Over-voltage, Over-current, Short circuit, Over-temperature
- Dimensions: approx. 72 (W) × 72.2 (H) × 31.1 (D) mm
approx. 2.834 (W) × 2.842 (H) × 1.224 (D) inches
The attached USB Type-C cable 28V/5A length :
approx. 1.0m approx. 39.37inches 2 cables.
- international plug adapter.
- Weight : approx. 250g / 0.551lbs
Charge time standard : For the latest charging time information, please visit our website (<https://idxtek.com/charging-times/>)

Location and Function of Parts

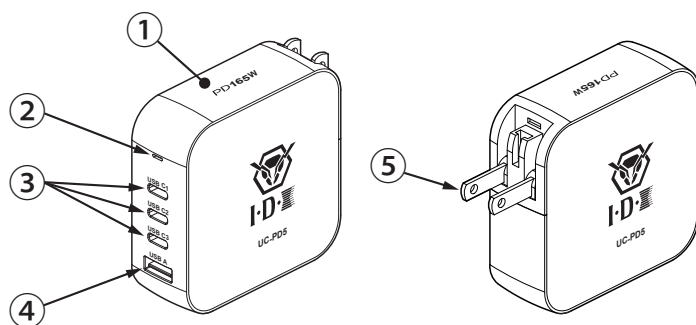


- ① Body
- ② Power LED
- ③ USB-C connector ×3
- ④ USB-A connector ×1
- ⑤ AC plug




* The shape of the AC plugs varies by region

Charging power specification on 4 ports (The power in the figure shows the maximum value)


●Single port use

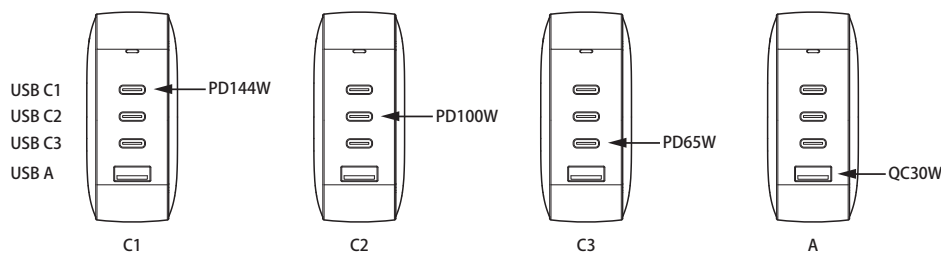


●Dual port use

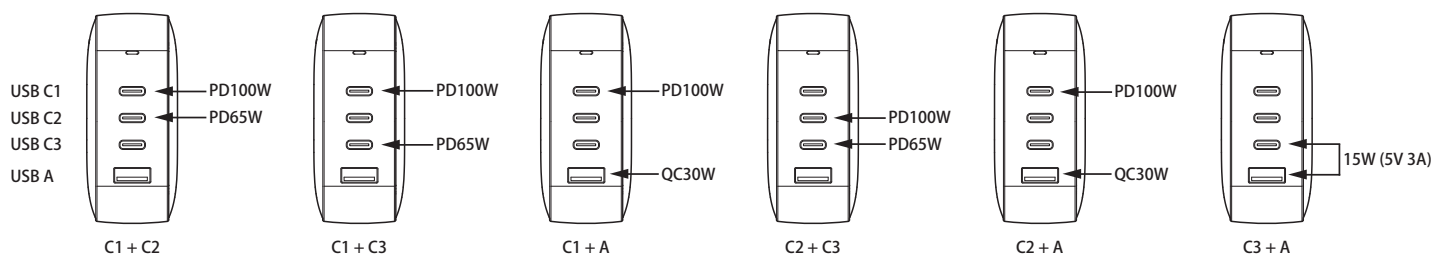

●Three port use

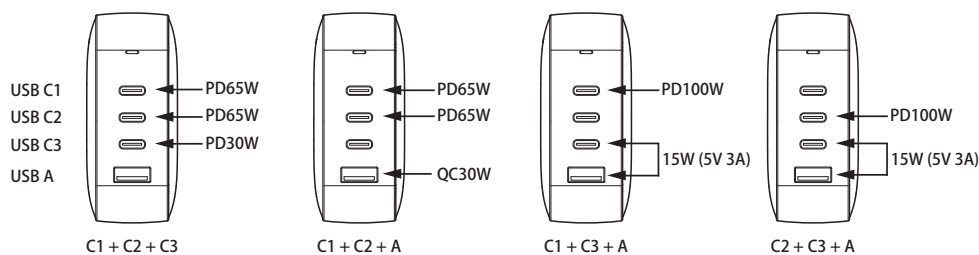

●Four port use



Caution

- The surface of the unit may become hot during operation.
This product is designed for indoor use, so be sure to operate it within the specified operating temperature range described in this manual.
In particular, under certain conditions—such as when supplying up to 140W from the C1 port—the unit may become hot.
- This product is designed to dispense heat from the casing. Use on a flat surface well ventilated.
- This product meets the applicable safety standards. It can be used without problems even if the charger becomes hot.
- Charging with USB Power Delivery requires to connect the equipment which supports USB Power Delivery.
- The output voltage is switched automatically when connecting the battery.
- Depending on the condition of the connected battery it may not be charged with the maximum power, this is not a malfunction.
- Please use the USB Type-C cable included. It is compatible with the USB PD standard and can be charged up to 140W (Single charging).
- When supplying power at up to 30W via the USB Type-A port, use a Quick Charge-compatible cable.
- Please insert the USB connector firmly. Charging starts automatically once plugged in.
- Charging will start automatically when the USB-C connector of the charging cable is connected to an IDX battery equipped with PD .
- Please check the charging status by pressing LED check button on the connected battery.
- Some devices may not be charged, depending on the specifications and performance of the device.

Compensation for recorded content

- Recorded content cannot be compensated for if recording or playback is disabled due to a malfunction of the battery pack or other devices.



* Design and specifications are subject to change without notice.

* USB Type-C® and USB-C® are trademarks or registered trademark of USB Implementers Forum companies.

Manufacturer : IDX Company, Ltd. 6-28-11 Shukugawara, Tama-ku, Kawasaki-shi, Kanagawa-ken, 214-0021 Japan
Tel : +81-44-850-8801 Fax : +81-44-850-8838 URL : <https://www.idx.tv/> E-mail : idx.japan@idx.tv
Importer for UK : IDX Technology Europe, Ltd. 933 Yeovil Road, Slough Trading Estate, Slough, Berkshire, SL1 4NH, England
Tel : +44-1753-547692 Fax : +44-1753-546660 URL : <https://www.idx-europe.co.uk/> E-mail : idx.europe@idx.tv
Importer for EU : IDX Technology Europe, Ltd. [German Branch] Johannishöhe 19 Kottgeisering 82288, Germany
Tel : +49-171-8632-661 URL : <https://www.idx-europe.co.uk/> E-mail : idx.germany@idx.tv
Importer for USA : IDX System Technology, Inc. 24422 S Main St Suite #502, Carson, CA 90745, USA
Tel : +1-310-328-2850 Fax : +1-310-328-8202 URL : <https://www.idxtek.com/> E-mail : idx.usa@idx.tv

202604
C3MK260044-1

