

IA-300a

210W AC Adaptor



Instruction Manual

Thank you for purchasing the IA-300a. The IA-300a is a compact and rugged AC power adaptor for professional cameras, monitors, and production equipment. Please read this Instruction Manual and keep it for future reference. For questions or service, please contact your local IDX office listed at the bottom of this manual.

⚠ WARNING

May cause sudden serious injury and death

- Do not connect to an AC power source that exceeds the voltage specification stated on the unit.
- Do not short the contact pins with a metal object.
- Avoid metal contact to the connectors.
- Do not expose the unit to direct sunlight; use in well ventilated place.
- Do not immerse in water. Keep the unit away from excessively dry or humid environments.
- Do not attempt to open the outer casing or break it apart.
- In case of fault or service, please contact your IDX dealer or appropriate IDX office.
- Do not drop or apply force to the unit. Do not subject the unit to extreme physical impact or pressure.
- Do not attempt to use if damaged.
- Protect the power cord from any damage. Please do not use a damaged power cord.
- If there is an irregular smell, discoloration, or deformation, immediately turn the unit off and unplug the power cable from the AC mains.

⚠ CAUTION

May cause injury or damage other equipment

- The unit should be used under the conditions listed in this manual.
- Do not expose the unit to extremely high temperatures beyond the range listed in this manual.
- It is normal for the top and bottom surface temperatures of the unit to increase during use.
- Do not rest any object on the unit or block the ventilation holes during operation.
- Use the approved power cord / connector / plug which conforms to the proper ratings (voltage, amperage) and safety regulations of each country as applicable.
- This is a class A product and may cause radio interference. In case of radio interference, please take appropriate measures.
- Please use the provided cable and connector and insert the connector firmly.
- The orientation of the unit should be horizontal with the four rubber feet facing down on a flat and stable surface.

Features


- Universal Auto switching Power Supply – the IA-300a can accept AC power ranging from 100~240VAC.
- IA-300a can be used as a DC power supply for professional cameras, monitors, teleprompters, and other production equipment.

Specifications

- Input voltage : 100V-240V~ 50Hz / 60Hz
- Power consumption : 2.6A-1.1A MAX 260VA
- DC Output : 15.1V/13.9A (210W)
- DC Connector : XLR 4P (1pin : - / 4pin : +)
- Operating temperature : 0~40°C
- Operating humidity : 20% ~ 90%RH
- Weight : approx. 2000g (4.4lbs)
- Dimensions : 126(W) x 75(H) x 245 (D) mm
4.96(W) x 2.95(H) x 9.65(D) inches

How to use

- 1 : Connect AC power cord firmly.
- 2 : Switch the power switch ON.
- 3 : Connect the DC cable to the body and switch ON the equipment.
- 4 : When power is ON, the DC outputs ①, ②, ③ are output in parallel.
(4P-XLR Connectors MAX 10A for single connector, total in parallel is MAX 15.1V / 13.9A)

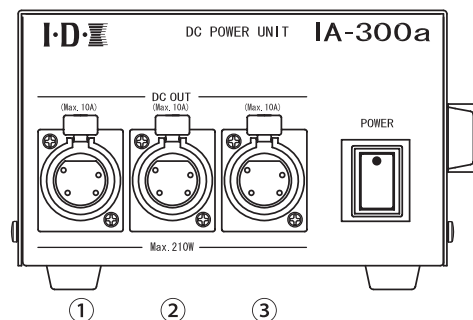

Manufacturer : **IDX Company,Ltd.** 6-28-11 Shukugawara, Tama-ku, Kawasaki-shi, Kanagawa-ken, 214-0021 Japan

Tel : +81-44-850-8801 Fax : +81-44-850-8838 E-mail : idx.japan@idx.tv

Importer for EU : **IDX Technology Europe,Ltd.** Unit 9, Langley Park, Waterside Drive, Langley, Berkshire SL3 6AD, England

Tel : +44-1753-547692 Fax : +44-1753-546660 E-mail : idx.europe@idx.tv

Importer for USA : **IDX System Technology, Inc.** 2377 Crenshaw Blvd, Suite 160, Torrance, CA 90501 USA

Tel : +1-310-328-2850 Fax : +1-310-328-8202 E-mail : idx.usa@idx.tv



ASMK180247-2
201809

Home Page : <https://www.idx.tv>

* Design and specifications are subject to change without notice.

