

NP-Style Li-ion Battery

Instruction Manual



Thank you for purchasing the NP-L7S NP-Style Li-ion Battery. Prior to using the NP-L7S, we strongly recommend that you read this Instruction Manual on how to best use the NP-L7S and keep this manual for future reference. If you have any additional questions, please contact the appropriate IDX office listed at the end of this manual.

⚠ DANGER

May cause sudden serious injury and death.

- Charge with IDX battery charger only.
- Only use the NP-L7S with professional video cameras or professional video equipment. Do not use with any other equipment. Please contact IDX for more information.
- Do not short the contact pins with any metal object. Do not carry or store with metal equipment.
- Do not expose to heat and never throw the battery in a fire.
- Do not immerse in water. Keep the NP-L7S dry and away from excessively dry or humid environments.
- Do not leave the battery exposed to excessive heat such as in a car or directly under the sun. Do not charge, discharge or store in an environment which is above or below IDX's specified temperature.
- Do not solder on the contact pins directly.
- Do not attempt to open the outer casing or break apart the NP-L7S.
- Do not subject the unit to extreme physical impact or pressure, or place any object across the terminals that could cause it to short.
- Do not pierce or drill into the outer casing of the unit.
- Do not attempt to use the NP-L7S if damaged.

⚠ WARNING

May cause serious injury and death.

- Please handle and use the NP-L7S with care if the temperature climbs to 50°C when discharged at a high load.
- Stop charging immediately if the NP-L7S fails to fully charge within the designated time limit.
- Do not use if the NP-L7S has an unusual appearance (smell, heat, discolour etc.) when in use, during charge or in storage.
- Keep away from fire if the battery leaks fluid or has an unusual smell. In case of a leak, wash your hands and face thoroughly with clean water immediately. Check with your doctor if fluid gets into contact with your eyes.

⚠ CAUTION

May cause injury or damage other equipment.

- Follow instructions on charging and discharging.
- Store the NP-L7S in cool and dry conditions.
- Do not leave the NP-L7S attached to the camera unused for long periods of time.
- Do not use, store or place the NP-L7S in an electrostatic area.
- Always keep the data terminals and connectors clean.

Features

- Light weight, compact, high performance Li-ion battery.
- Three-step LED power status indicator accurately displays remaining power capacity.

Charging

- The NP-L7S Li-ion battery product should be used with IDX Li-ion chargers only. Refer to the instruction manual of the IDX charger for a description of the charging procedure.
- Estimated charging times may vary depending on the charger model. Refer to the IDX website or brochure for details of charging times.
- The NP-L7S can be charged in an ambient temperature range of 0°C~40°C. For optimum charger performance 10°C~30°C is recommended.
- If the temperature of the NP-L7S is below 0°C, it will not fully charge even if the designated charge time has passed. The battery must be charged within the recommended temperature range.
- The NP-L7S will exhibit a small amount of self discharge. IDX recommend charging before use.

Discharging

- When using the NP-L7S with video or lighting equipment, the total power consumption must be 50W or below. To protect the battery, a load of 50W or more may activate the internal protection circuit and stop the supply of power. If the operating temperature is too high, the thermal protection fuse will activate and not reset, which may cause damage to the battery.
- In general, the battery discharge time will be shortened if the load /power consumption is higher.
- Discharge capabilities are reduced when the battery is used in extreme low/high temperature environments. Operating times may also shorten depending on the load and power consumption of the equipment used. This is most noticeable with older, more frequently used battery packs. Discharging at an ambient temperature of 10°C~40°C is recommended.
- The voltage range of the NP-L7S during discharge is 13~15V and stable. If discharged below 13V the voltage drops sharply. For optimum use, IDX recommend that the camera battery alarm voltage is set at approximately 13V in the video camera menu. Refer to the specific camera manual for its recommended alarm setting.
- If the NP-L7S is discharged below 11V, the excessively low discharge accelerates the deterioration of the battery life. To extend

the battery life, it is recommended to stop discharging at 12V or above.


- Transmitter equipment with a power output above 5W should be kept as far away from the battery as possible, as it may disrupt, or even stop, the battery discharge.

Battery capacity display LEDs

- Remaining battery capacity is shown by a built-in three LED power status indicator, which is displayed F as 'fully charged' and E as 'need to charge'.
- To check the remaining battery capacity press the check button. The LED lights will then indicate once the check button has been depressed.



Terminals

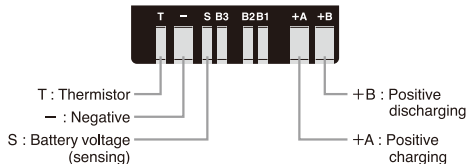

Battery protection circuitry

There are four in-built protection circuits to ensure the NP-L7S is protected from common causes of misuse with Over-charge, Over-discharge, Over-current and Thermal protection. If the thermal fuse is blown when it detects use at high temperature or high load, charging and discharging will not function.

Storing

- Deterioration of battery performance is accelerated when the NP-L7S is stored in a higher ambient temperature, and also if the battery is stored for a long period of time without use. IDX recommend 20°C or below when the battery is stored for longer than 1 month.
- Do not store or leave the battery pack in temperatures of 50°C or above.
- To store the battery for a longer period of time (more than 5 months), the battery should be charged up to 20% of capacity and left in this condition. This should be repeated every 5 months.

Life cycle

- Battery life may vary depending on usage, storage and frequency of use.
- Battery life will be reduced if frequently used to support high loads.
- Battery life is also reduced if used and stored under high temperatures, or if stored in a fully charged condition for extended periods.

Specifications

- Cell chemistry : Li-ion
 - Maximum voltage : 16.8V DC
 - Nominal voltage : 14.8V DC
 - Capacity : 4.6Ah / 68Wh *1
 - Maximum discharge load : 4.6A / 50W
 - End voltage : 11.0V
 - Battery protection circuit :
 - Over-charge, Over-discharge, Over-current, Thermal protection
 - Ambient temperature :
 - To charge : 0°C~40°C (10°C~30°C recommended)
 - To discharge : -20°C~60°C (10°C~40°C recommended)
 - To store : -20°C~50°C (0°C~20°C recommended)
 - Dimensions / Weight :
 - 185(W)×72(H)×25(D) mm / approx. 460g
 - 7.28(W)×2.83(H)×0.98(D) inches / approx. 1.01 lbs
- *1. IDX measures capacity of Lithium Ion batteries as a minimum capacity.

Recycle of battery

This Li-ion battery can be recycled. Please follow the regulations in your country or contact your local IDX office for further details.



<http://www.idx.tv>

IDX Company, Ltd. : 6-28-11 Shukugawara, Tama-ku, Kawasaki-shi, Kanagawa-ken 214-0021 Japan
Tel: +81-44-850-8801 Fax: +81-44-850-8838 E-mail: idx.japan@idx.tv

IDX System Technology, Inc. : 19001 Harbortgate Way, Suite 105, Torrance, CA 90501 USA
Tel: +1-310-891-2800 Fax: +1-310-891-3600 E-mail: idx.usa@idx.tv

IDX Technology Europe, Ltd. : Unit 9, Langley Park, Waterside Drive, Langley, Berkshire SL3 6EZ England
Tel: +44-1753-547-692 Fax: +44-1753-546-660 E-mail: idx.europe@idx.tv

200902az



Li-ion



Li-ion Battery Air Transport Compliance (as of Jan 1st, 2009)

IDX NP-L7Ss are suitable for transport by air as not-restricted articles under the regulations of the International Air Transport Association (IATA) and the International Civil Aviation Organization (ICAO). The test for United Nations Recommendations on the Transport of Dangerous Goods have also passed the product. Consequently, this battery may be brought as carry-on baggage. It may not be brought as checked baggage.

IDX products can be transported in accordance with the above regulations, but IDX recommends that customers confirm with their carrier of choice to determine any local rules and policies before traveling.

For carry-on baggage

Extract from 2.3.5.9.1 for IATA Dangerous Goods Regulations (produced in consultation with ICAO).

Consumer electronic devices (watches, calculating machines, cameras, cellular phones, lap-top computers, camcorders, etc.) containing lithium metal or lithium ion cells or batteries when carried by passengers or crew for personal use, which should be carried in carry-on baggage. Spare batteries must be individually protected to prevent short circuits by placement in the original retail packaging or by otherwise insulating terminals, e.g. by taping over exposed terminals or placing each battery in a separate plastic bag or protective pouch, and carried in carry-on baggage only. In addition, each installed or spare battery must not exceed the following:

(b) for lithium ion batteries, a watt-hour rating of not more than 100Wh.

For cargo

1. Following the requirement in Part 1 of the PACKING INSTRUCTION 965 for IATA Dangerous Goods Regulations (produced in consultation with ICAO). This applies to lithium ion or lithium polymer cells batteries (UN 3480) on passenger and Cargo Aircraft Only.
2. Fill in the air way bill as below:
 - Lithium ion battery, NOT RESTRICTED as per PI 965 Part 1.
 - Considering the package must be handled with care and flammability hazard exists, if the package is damaged, indicate as in the following statement.
e.g.) "The package must be handled with care and flammability hazard exists, if the package is damaged."
 - Write handling procedures, etc. in case the package is damaged, according to applicable packing instruction.
e.g.) "Do not damage or mishandle this package. If package is damaged, batteries must be protected so as to prevent short circuit."
 - Write a telephone number for additional information.
e.g.) Contact TEL Number: +1-800-xxx-xxxx(US) / +44-xx-xxxx-xxxx (UK) etc.
3. Each package must be labeled with a lithium ion battery handling label indicating "lithium ion battery". When affixing lithium battery labels with IATA DGR7.4.8 FIGURE 7.4.1 specifications, they must not be folded or affixed in such a manner that parts of the same label appear on different faces of the package.
4. As for lithium ion battery (100Wh and below), it is necessary to indicate Watt-hour rating on the battery case exterior. However, for lithium ion batteries manufactured before December 31st 2008, indication is exempted until December 31st 2010.
5. Each package must be 10kg and below.
6. Use packaging that has passed the drop test (1.2m). Retain the results of the test. If there is a trouble or if an incident/accident occurs, you may be asked to submit the test results by the carrier or the competent authority.